GAS RANGES

60” COMBINATION GAS RANGES

Standard Features

- Stainless steel exterior including front, back sides, kick plate, back guard and over shelf
- 60” combination ranges standard with either a 24”, 36” or 48” griddle top with 2, 4 or 6 burners
- Heavy duty 3/4” thick polished steel griddle plate
- Drip tray provided under burners to catch grease drippings
- 25,000 BTU top burners, 27,000 BTU griddle & 27,000 BTU oven burners
- Oven temperature range between 175°F to 550°F
- Standing pilot for open top burners
- Oven pilot with 100% safety shut off
- Enamel interior oven for easy cleaning
- Multiple position oven rack guides
- One (1) chrome oven rack per oven standard
- Available in Natural and Propane
- 3/4” NPT rear gas connection and regulator provided

ATO-48G2B

ATO-36G4B

ATO-24G6B

标准配置

- 不锈钢外部结构: 前后，踢板，后部护罩和顶柜
- 60寸组合款，可选择12寸或24寸炉排，搭配2个或4个炉灶
- 坚实耐用3/4寸厚抛光钢炉排
- 炉灶底部滴盘可以捕捉滴油
- 25,000BTU炉灶，27,000BTU炉排和27,000BTU烤箱炉灶
- 烤箱温度: 175° F~550° F
- 开放式顶部炉灶和火种
- 烤箱火种可100%安全关闭
- 易清洁搪瓷烤箱内部
- 多个烤箱架高度档位
- 1个标准铬烤架
- 可选天然气或丙烷
- 3/4寸NPT标准后部燃气连接和调节

型号　燃气种类　炉灶名　BTU　炉灶数　烤箱尺寸　炉灶工作区域　炉排工作区域　阀门　净重　总重
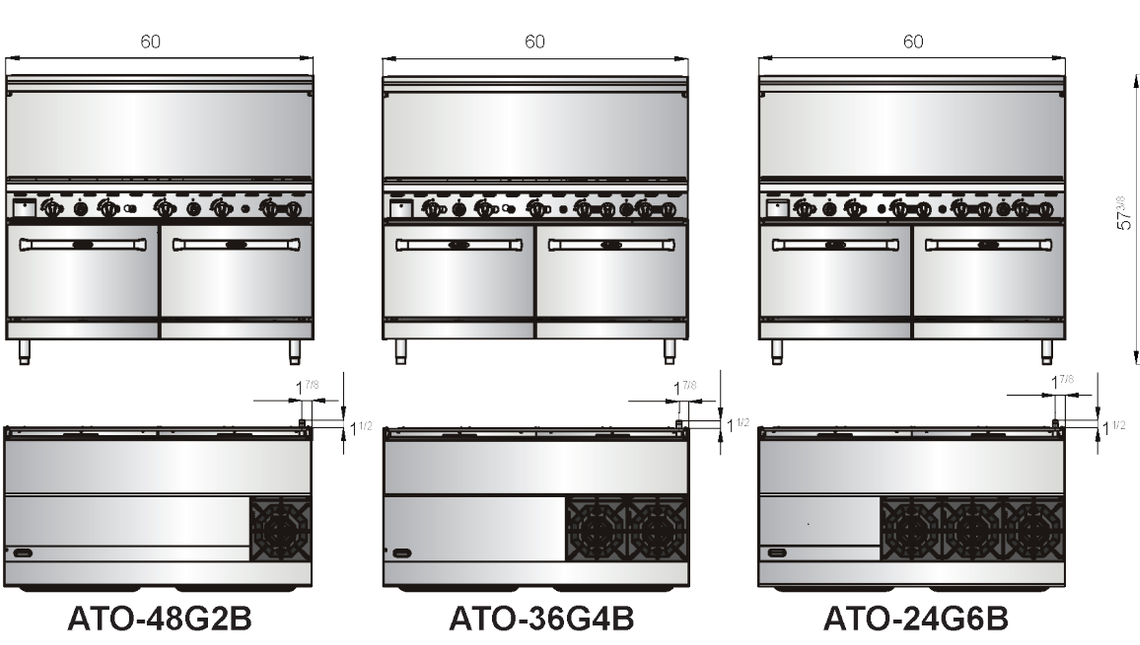
Model	Gas type	Burner name	BTU's	Number of burners	Oven size (inch)	Hot plates working area(inch)	Griddle working area (inch)	Valve types	Net weight (lbs)	Gross weight (lbs)
ATO-48G2B	NG	Hot plates	50,000	2	$26^{1/2}$×26×14	2pcs $11^{4/5}$× $11^{4/5}$	$48×20^{5/8}$	Pilot light	805	970.5
		Griddle	102,000	4						
		Oven	54,000	2						
	LP	Hot plates	46,000	2						
		Griddle	102,000	4						
		Oven	54,000	2						
ATO-36G4B	NG	Hot plates	100,000	4	$26^{1/2}$×26×14	4pcs $11^{4/5}$× $11^{4/5}$	$36×20^{5/8}$	Pilot light	792	948.9
		Griddle	75,000	3						
		Oven	54,000	2						
	LP	Hot plates	92,000	4						
		Griddle	75,000	3						
		Oven	54,000	2						
ATO-24G6B	NG	Hot plates	150,000	6	$26^{1/2}$×26×14	6pcs $11^{4/5}$× $11^{4/5}$	$24×20^{5/8}$	Pilot light	775	940.5
		Griddle	48,000	2						
		Oven	54,000	2						
	LP	Hot plates	138,000	6						
		Griddle	48,000	2						
		Oven	54,000	2