



Item: _____

Quantity: _____

Project: _____

Salamander Broiler

Salamander Broiler

Models: RSB-24 RSB-36 RSB-48



RSB-36

Gas Type: Natural LP

Elevation (if above 2000 ft.): _____

Range Mount Wall Mount

Range Width: _____"
(Range width necessary to determine bracket type. Width of Salamander cannot exceed range width.)

Standard Features

- Full width, removable stainless steel crumb pan for easy cleaning
- Stainless steel front and sides
- Individually adjustable infra-red burners provide powerful radiant heat
- Spring balanced broiler grid moves up and down with positive locking in three positions
- Standing pilots for instant safe ignition
- Easy loading and unloading with a roll-out carriage
- Stainless steel tubing for pilots


Options and Accessories

- 3/4" gas connection from range to RSB



2 YEAR LIMITED, PARTS AND LABOR WARRANTY

Salamander Broiler

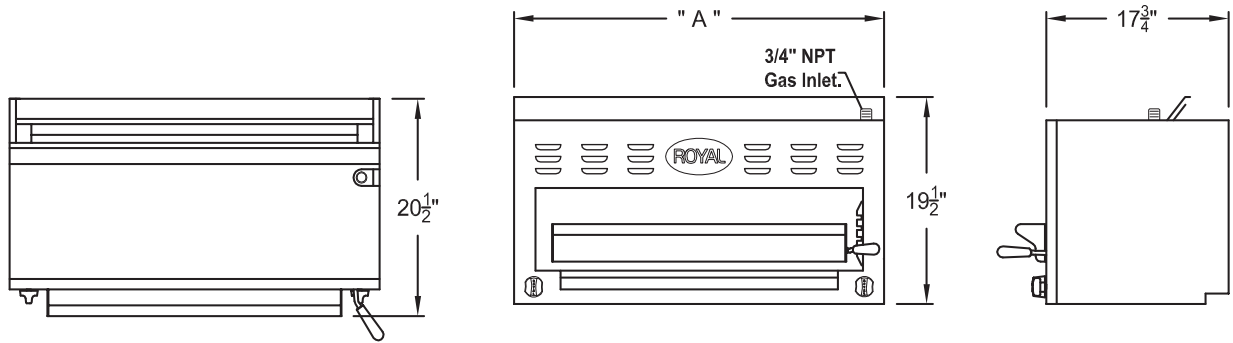

Model Number	Width (A)	Number of Burners	Total BTU	Ship Weight
RSB-24	24"	1 ¹	17,500	160 lbs.
RSB-36	36"	2 ¹	35,000	210 lbs.
RSB-48	48"	2 ²	40,000	252 lbs.

Notes:

1. Infra-red burners rated at 17,500 BTU/hr each.
2. Infra-red burners rated at 20,000 BTU/hr each.

Gas Pressure:

5" W.C.	Natural Gas
10" W.C.	Propane

Gas Connection:

3/4" NPT on the right hand rear of the appliance.
The pressure regulator (supplied) is to be connected by the installer.

Clearances:

	Combustible	Non-Combustible
Rear	4"	0"
Sides	4"	0"

Specify type of gas and altitude, if over 2,000 feet, when ordering.